


CABLE UTP TITANIUM CCA CAT 5E INTERIOR 305M



Especificaciones

 Referencia	 Categoría	 Uso
TTA196	5	Interior

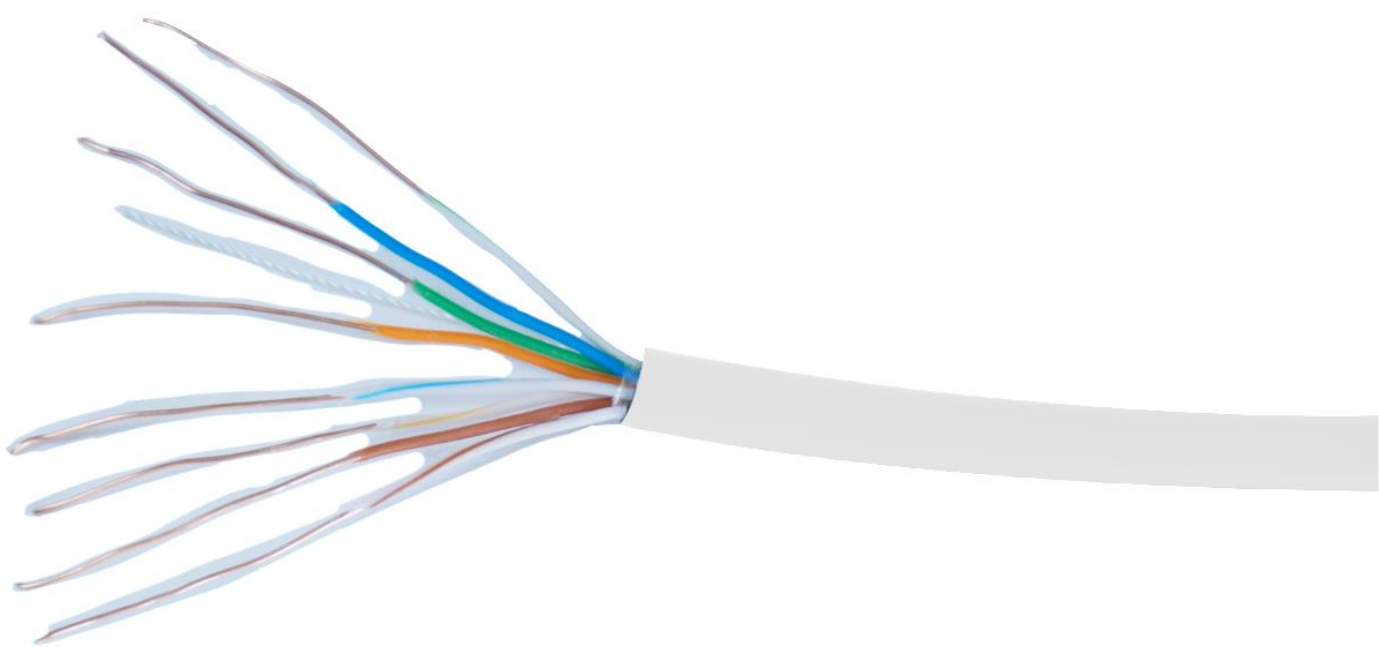

Datos Técnicos

Cable UTP Categoría 5 para uso interior, presentación en rollo de 305 metros, ideal para transmisión de datos, señales digitales y analógicas, tecnología para transmitir datos a alta velocidad, cubierta de PVC, color del cable blanco.


AWG: 24AWG
Resistencia de conductor Ω /1000FT 20°C: $\leq 60\Omega$
Conductor permite corriente de carga (A): 0,5A
Rango de Voltaje (V): $\leq 30V$

Aplicaciones:
100 Base-TX
100 Base-T4
100VG- Cualquier LAN
1000Base-T (Gigabit Ethernet)

Dimensiones



Peso	7 Kg
Largo	42 cm.
Ancho	35 cm
Alto	39,5 cm

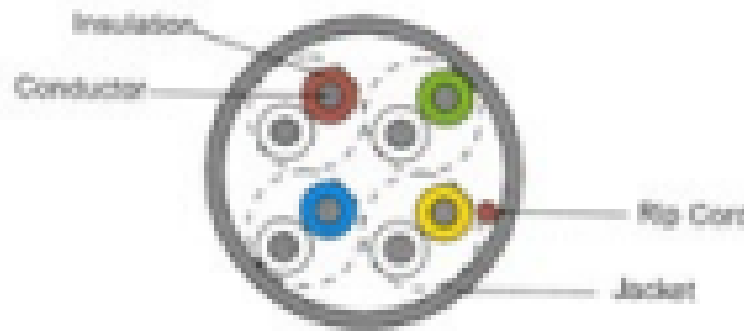Product Specification			
PRODUCT & SPEC.		24AWG CAT5E UTP	CONFIGURATION 
INDESIDE		4PRS	
CONDUCTOR	CONFIGURATION	4X2X0.46MM±0.01	
	MATERIAL	CCA MATERIAL	
	WORK DATAPASS	110~120M	
	Pass Fluke	N/M	
INSULATION	MATERIAL	HDPE	A.Orange/Orange&White B. Blue/Blue&White C. Brown/Brown&White D. Green/Green&White
	PE OD	0.9MM-0.93MM	
PAIRED PITCH	BLUE/BLUE&WHITE	12MM	
	ORANGE /ORANGE &WHITE	16MM	
	GREEN/GREEN&WHITE	14MM	
	BROWN/BROWN&WHITE	18MM	
PACKING		/	INSIDE CABLE SEQUENCE: BLUE/BLUE&WHITE,ORANGE/ORANGE&WHITE, GREEN/GR EEN&WHITE,BROWN/BROWN&WHITE
	PACKAGE	305M/BOX	
	GRROUND	/	
CROSS CENTER	PE	/	
SKIN	MATERIAL	PVC /LSZH	
	COLOR	AS CUSTOMERS	
	PVC OD	5.1MM-5.3MM	
	PVC THICKNESS	0.53MM-0.56MM	
	SERFACE	SMOOTH	
PERFORMANCE	CONDUCTOR RESISTANCEΩ/100M.20℃	≤65Ω	
	CONDUCTOR ALLOW LOAD CURRENT(A)	0.5A	
	VOLTAGE RATING(V)	≤30V	
	OPERATING TEMPERATURE(℃)	≤75℃	
PRINTING	COMMUNICATION CABLE 4/24AWG CAT5E UTP VERIFIED TO TIA/EIA 568B.2 & ISO/IEC 11801 001-305M		